

STAINLESS STEEL AIR RELEASE VALVE

■ Fig.1901



CHARACTERISTIC


- Adopting a bubble separation structure to prevent the impact caused by the separation of bubbles by the floating ball and automatically closes according to the spring force, ensuring reliable operation.
- The structure is simple and durable.
- Compact structure and good exhaust capacity.
- There is a manual shut-off device at the exit.

TECHNICAL SPECIFICATION


Size	DN15 ~ DN25
Working Pressure	PN10
Suitable Medium	Water, Concentration ≤ 50% Ethylene Glycol Solution
Working Temperature	0°C ~ 100°C

MAIN MATERIALS

No.	Part	Material	Specification
1	Body	Stainless Steel	SS304
2	Bonnet	Stainless Steel	SS304
3	Sealing Gasket	Rubber	--
4	Seat	Copper	--
5	O-Ring	Rubber	--
6	Spring Support	Stainless Steel	SS304
7	Outlet Pipe	--	--
8	Handle	--	--
9	Sealing Gasket Seat	Copper	--
10	Float	Plastic	--
11	Spring	Stainless Steel	SS304
12	Lever	Stainless Steel	SS304

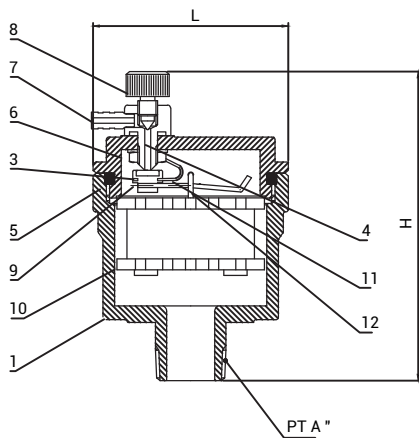

AIR PERFORMANCE EMISSION DIAGRAM

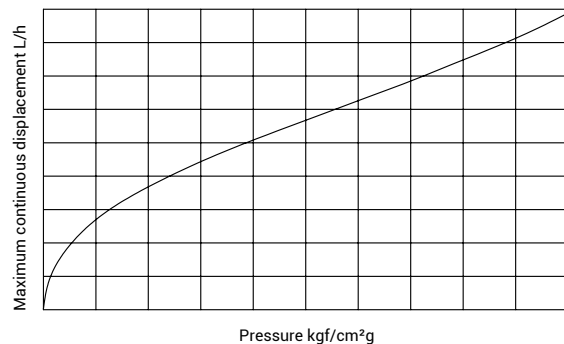

DIMENSION

DN	INCH	PT A"	H mm	L mm	Weight kg
15	1/2"	1/2"	112	59	0.6
20	3/4"	3/4"	112	59	0.6
25	1"	1"	125	59	0.7