


STAINLESS STEEL SILENT CHECK VALVE

■ Fig.5184-T



TECHNICAL SPECIFICATION

Design Standard	GB/T 13932-2007
Connection Standard	HG/T20592-2009
Testing Standard	GB/T 13927-2008
Face to Face Standard	GB/T12221-2005
Size	DN40 ~ DN600
Working Pressure	PN16
Suitable Medium	Water, Concentration ≤ 50% Ethylene Glycol Solution
Working Temperature	0°C ~ 80°C

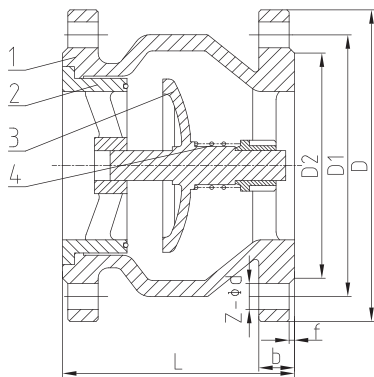

MAIN MATERIALS

No.	Part	Material	Specification
1	Body	Stainless Steel	CF8
2	Seat	Stainless Steel+EPDM	SS304
3	Disc	Stainless Steel	CF8
4	Spring	Stainless Steel	SS304

DIMENSION

DN	INCH	L mm	D mm	D1 mm	D2 mm	z-φd	b mm	f mm
40	1½"	112.0	150	110	88	4-φ18	18	2
50	2"	120.0	165	125	102	4-φ18	18	2
65	2½"	130.0	185	145	122	8-φ18	18	2
80	3"	150.0	200	160	138	8-φ18	20	2
100	4"	165.0	220	180	158	8-φ18	20	2
125	5"	190.0	250	210	188	8-φ18	22	2
150	6"	210.0	285	240	212	8-φ22	22	2
200	8"	255.0	340	295	268	12-φ22	24	2
250	10"	255.0	405	355	320	12-φ26	26	2
300	12"	300.0	460	410	378	12-φ26	28	2
350	14"	380.0	520	470	428	16-φ26	30	2
400	16"	405.0	580	525	490	16-φ30	32	2
450	18"	430.0	640	585	550	20-φ30	40	2
500	20"	450.0	715	650	610	20-φ33	44	2
600	24"	515.0	840	770	725	20-φ36	54	2