
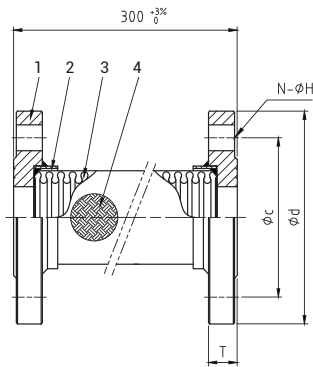


FLANGE TYPE FLEXIBLE HOSE

■ Fig.GF600



CHARACTERISTIC

- Have good flexibility.
- Have good corrosion resistance, high temperature resistance, wear resistance performance.
- Have good tensile strength, waterproofing performance.
- Can provide excellent electromagnetic shielding performance.

TECHNICAL SPECIFICATION

Testing Standard	BS EN12266, GB/T13927
Flange Connection Standard	BSPT, ISO7-1
Size	DN50 ~ DN400
Working Pressure	PN16
Suitable Medium	Water, Concentration ≤ 50% Ethylene Glycol Solution
Working Temperature	-20°C ~ 120°C

MAIN MATERIALS

No.	Part	Material	Specification
1	Flange	Stainless Steel	SUS304
2	Ferrule	Stainless Steel	SUS304
3	Bellows	Stainless Steel	SUS304
4	Braid	Stainless Steel	SUS304

DIMENSION

DN	INCH	φd mm	φc mm	T mm	N-φH
50	2"	165	127	23	8-φ19
65	2½"	190	149	26	8-φ22
80	3"	210	168	29	8-φ22
100	4"	255	200	32	8-φ22
125	5"	280	235	35	8-φ22
150	6"	320	270	37	12-φ22
200	8"	380	330	42	12-φ25
250	10"	445	387	48	16-φ29
300	12"	520	451	51	16-φ32
350	14"	585	514	54	20-φ32
400	16"	650	572	58	20-φ35