

NORDIC VALVES

FM APPROVED


Swing Check valve - Flanged Ends

Fig. NSC-F

Valve Standard
Conforms to AWWA C508
Clear Waterway

Working pressure
365 PSI

Connection Ends
ANSI B16.1
EN1092-2
PN10/PN16/PN25

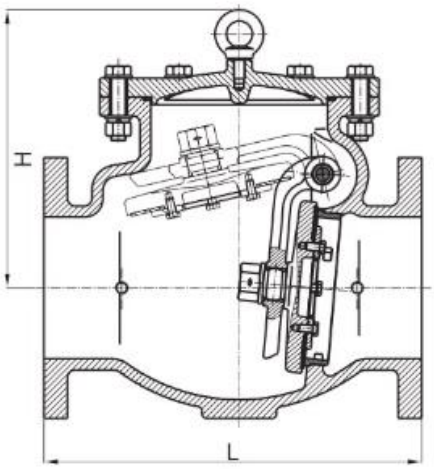

Part Name	Material	Specification
Body	Ductile Iron	A536 65-45-12
Cover	Ductile Iron	A536 65-45-12
Clapper	Ductile Iron	A536 65-45-12
Clapper Arm	Ductile Iron	A536 65-45-12
Disc Seals	EPDM	
Hinge Pin	Stainless Steel	AISI 304
Seat	Bronze	ASTM B62
	Stainless Steel	AISI 304

SIZE	mm	50	65	80	100	125	150	200	250	300
	inch	2	2½	3	4	5	6	8	10	12
L	mm	203	254	279	330	356	406	495	559	660
	inch	8	10	11	13	14	16	19.5	22	26
H	mm	122	133	136.5	219.5	296	298.5	357	410	463
	inch	4.80	5.23	5.37	8.64	11.65	11.75	14.06	16.14	18.31