NORDIC VALVES

FM APPROVED




Swing check valve with plug – Grooved

Fig. NSC-GP

Features
Low pressure drop
Convenient to install

Working pressure
365 PSI

Connection Ends
AWWA C 606
VDS2100/AS2638.2

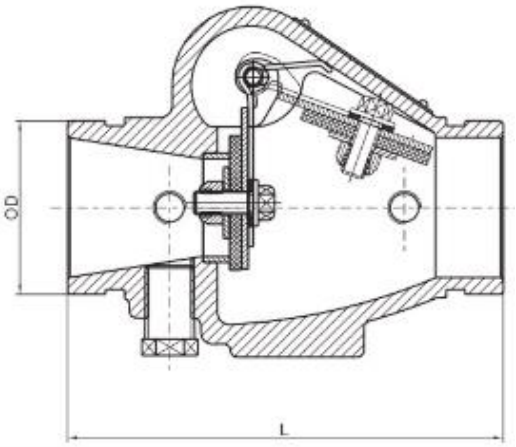

Part Name	Material	Specification
Body	Ductile Iron	ASTM A536 65-45-12
Seat	Bronze	ASTM B62 C83600
Clapper	Q235+SS304+EPDM	
Clapper Arm	Stainless Steel	ASTM A351 CF8
Washer	Stainless Steel	AISI 304
Hexagonal Slot Thin Nut	Stainless Steel	AISI 304
Split Pin	Stainless Steel	AISI 304

SIZE	mm	50	65	80	100	125	150	200	250	300
	inch	2	2½	3	4	5	6	8	10	12
L	mm	169	203	213	245	267	292	356	432	495
OD	mm	60,3	76.1	88,9	114,3	139.7	168.3	219,1	273	323,8