

NORDIC VALVES

FM APPROVED


Resilient Seated OSY Type – Flanged x Grooved

Fig. NSG-OSY-FG

Valve Standard
Conforms to AWWA C515/BS5163
Fusion bonded coating comply with AWWA C550

Working pressure
365 PSI

Connection Ends
ANSI CLASS 125/ANSI Class 150
BS EN1092-2 PN16S

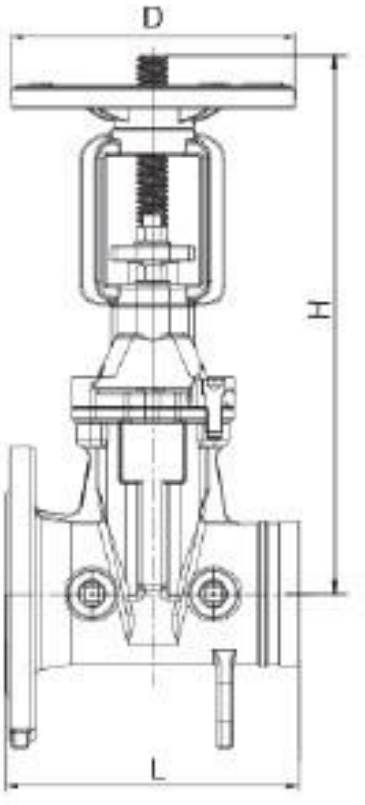

Part Name	Material	Specification
Body	Ductile Iron	A536 65-45-12
Wedge Disc	Ductile Iron	EPDM Coated
Disc Nut	Bronze	ASTM B62
Stem	Stainless Steel	AISI 304
Bonnet	Ductile Iron	A536 65-45-12
Gasket	EPDM	Commercial
Thrust Collar	Bronze	ASTM C51100
Gland	Ductile Iron	A536 65-45-12
Wrench Nut	Ductile Iron	A536 65-45-12
Post Plate	Ductile Iron	A536 65-45-12

SIZE	mm inch	50 2	65 2½	80 3	100 4	125 5	150 6	200 8	250 10	300 12
L	mm inch	178	191	203	229	254	267	292	330	356
H	mm inch	409	409	463	522	715	715	913	1118	1300
D	mm inch	160	160	220	220	280	280	370	420	420